

ZGSM-ST17-155M

Introducing a New Premium Experience



CE CB RoHS
LM-79 LM-80 TM-21 ENEC

5 YEAR WARRANTY

Specifications

Electrical Specifications:

Model No.	ZGSM-ST17-155M
Nominal Wattage	155W
Nominal Voltage	AC 100-240V /277V, 50/60Hz
LED	Lumileds, Luxeon 3030 2D
Driver	Inventronics, EBS-165S105BT2
Optional Function	OLC, NTC, StepDIM, 0(1)-10V, DALI
Operating Temperature	-40 °C to +50 °C
Power Factor (PF)	> 0.95
THD	< 15
Protection	Class I (Class II optional)
SPD	10KV (20KV optional)

Photometric Specifications:

Lumen Output *Regular Version: 22165 lm (±5%)*

Optic *TYPE II, TYPE III*


CRI *Ra ≥ 70 (80 optional)*

CCT




Mechanical Specifications:

Ratings	IP66, IK10
Lifetime	> 100, 000 hours-L70, @25 °C (77 °F)
Body	High pressure die-cast aluminum, self cleaning
Pole Fitter Diameter	48-60mm
Lens	UV-resistant Polycarbonate
Fixture Dimension	660 x240 x143 mm
Packing Dimension	600 x295 x175 mm
Fixture Weight	5.8 kg
Packing Weight	6.4 kg

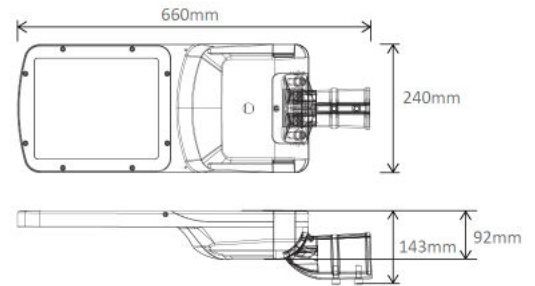


3030 Version

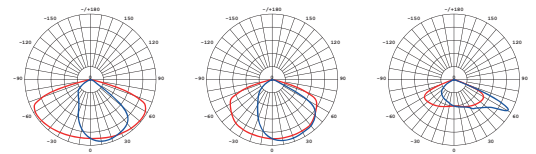

T2553001

T3553002


T3553003



T2M53007

T3M53009


5050 Version

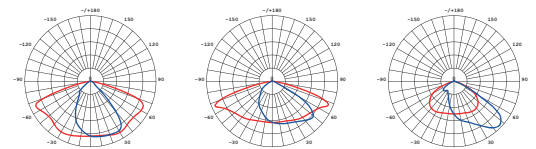

T2555004

T3M55005

T3555006



T2M55008

T3M55010

Optional accessories:



Photocell



Shorting Cap



Smart Controller



Motion Sensor



Camera



(3/5/7pin) NEMA Socket



Knife switch



ZHAGA Socket



Adapters