


ZG-1058 Pendant Luminaires





HEAT DISSIPATION PERFORMANCE

Advanced FEA technology designs for the structure thermal transfer to guarantee the LED PCB and chips can use for long life.

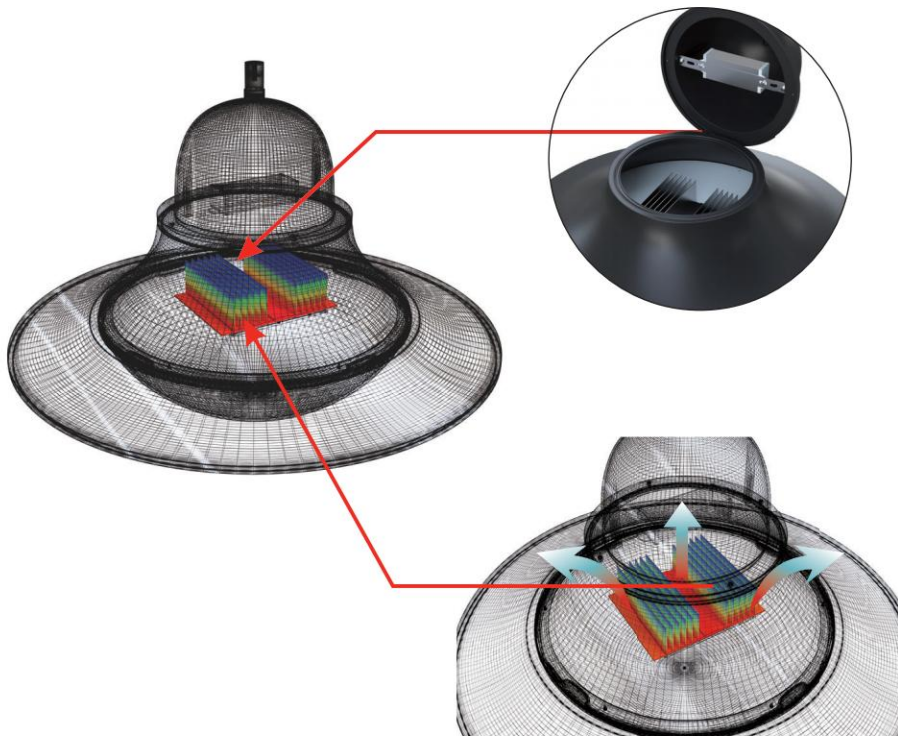

Non-contact structure for LED drivers and heat sinks. The electrical parts are in cool status.

Stretching aluminum heat sinker is designed inside. The air convection structure enhances the lumen maintenance performance.

THERMAL- ELECTRICAL DIVIDED

Product Overview



Mounting Spigot

Die Cast Aluminum Top Cover

10/20KV SPD

inventronics Programmable LED driver

Die Cast Aluminum Housing

Stretched Aluminum Heat Sink

Thermal Conductive Aluminium PCB

SMD 3030 /5050 LED 

Silicon Gasket



Optical Lens

Front Cover


PC Diffuser Holder

Anti-UV PC Diffuser


Dimension(mm)

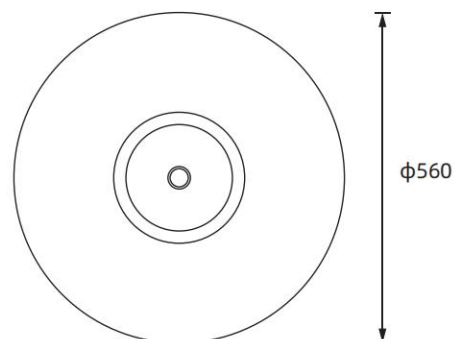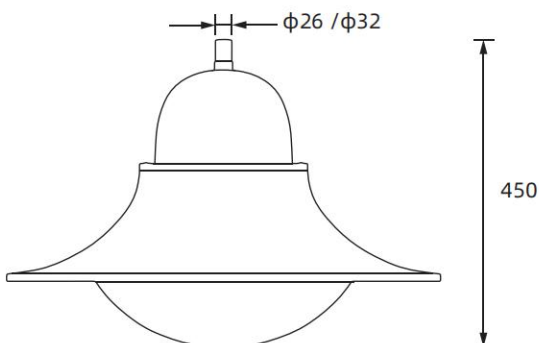


Light Distributions

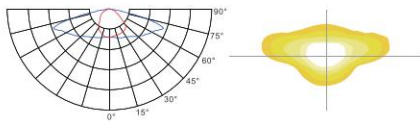


Type I 30x150

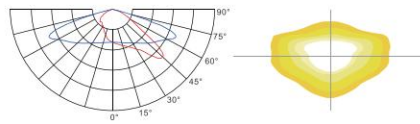


Type II 45X140

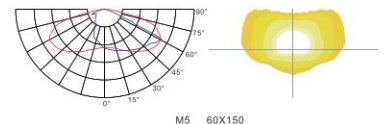


M5 60X150

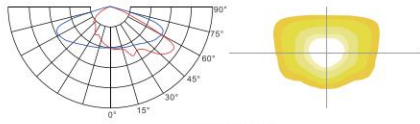


Type III 58X130

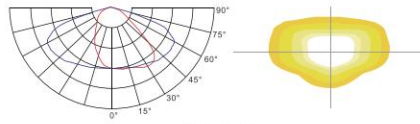


Ver B 35X140

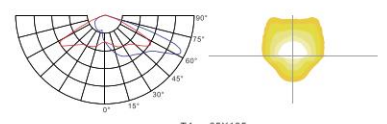


T4 65X135

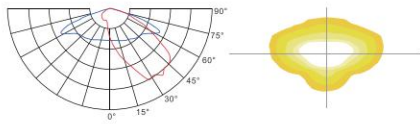


M1 45X130

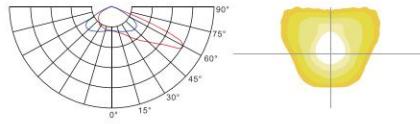


M6 60X135

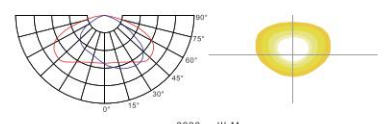


3030 III-M

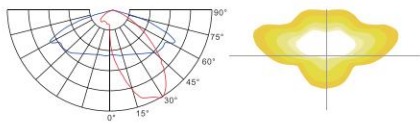


R3 25X140

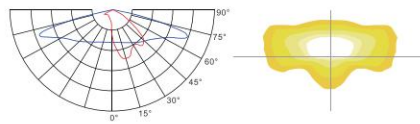


P4 20X145

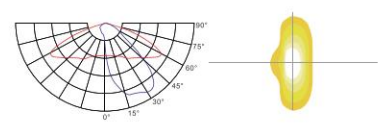


M2 30X130

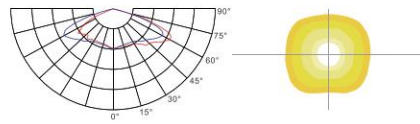


Type V 130X130

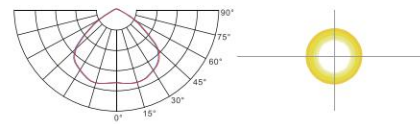


V90 90X90

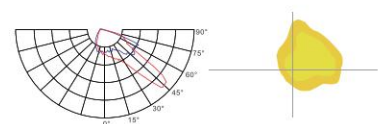


PR

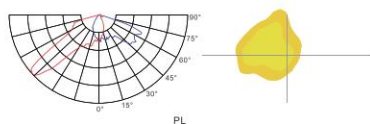

PL

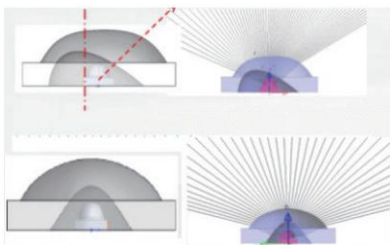


Asymmetric
Optics

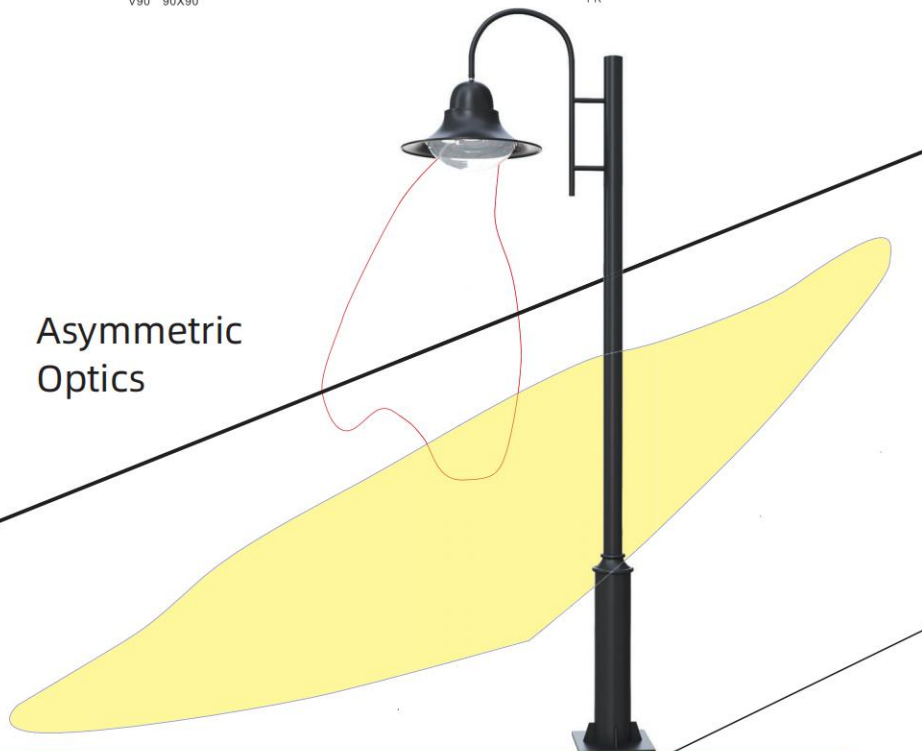



SUGGESTED INSTALLATION HEIGHT

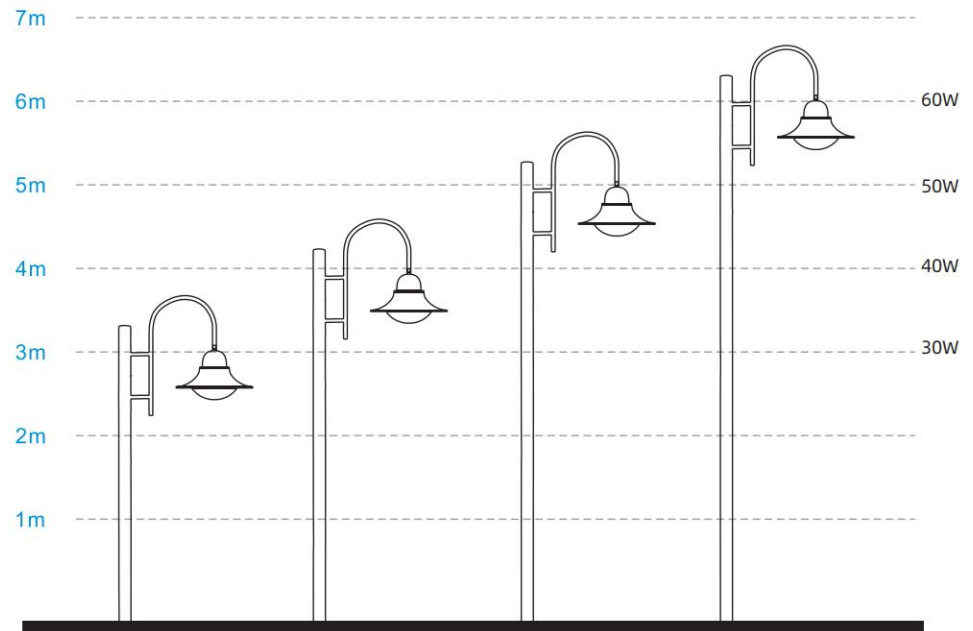

CHARACTERS

| Power | 30W | 40W | 50W | 60W |
|--------------------------|---|-------------|-------------|-------------|
| Protection Class | CLASS I/II | | | |
| IP/IK Rating | IP66, IK08 | | | |
| Color Temperature | 2200K-6500K | 2200K-6500K | 2200K-6500K | 2200K-6500K |
| Efficiency | 130 LM/W | 130 LM/W | 130 LM/W | 130 LM/W |
| CRI | 70/80 | 70/80 | 70/80 | 70/80 |
| Input Voltage | AC 90-305V/347V/480V, 50/60Hz | | | |
| Driver Suggest | INVENTRONICS EBS, INVENTRONICS EUM | | | |
| Dimming | 1-10V Dimming (Default) /Timer Dimming | | | |
| Surge Recommendation | 10KV (Default) / 20KV (available on request) | | | |
| LED Type | LUMILEDS SMD LED | | | |
| LED Quantities 3030 | 48 | 64 | 80 | 96 |
| Pcb Input Current (3030) | 48V 540mA | 48V 740mA | 48V 920mA | 96V 680mA |
| Mounting | Suspending with installation spigot dia 26mm/32mm | | | |
| Material | Die casting with standard adc12 type aluminum, stainless 314 clips and screws. Clear polycarbonate with uv-resistant acrylic. Option for screen for asymmetrical light. | | | |
| Painting Color Suggest | RAL9005 Jet Black /Other Colors on request | | | |
| Available on request | Motion Sensor, NTC, OLC, DALI Dimming, Smart Controller | | | |
| Weight | Net weight: 6kgs Gross weight: 7kgs | | | |
| Packing Size | 580x580x480mm | | | |