




ZG-900 Post Top Luminaires





HEAT DISSIPATION PERFORMANCE

Advanced FEA technology designs for the structure thermal transfer to guarantee the LED PCB and chips can use for long life.

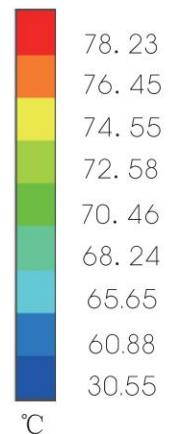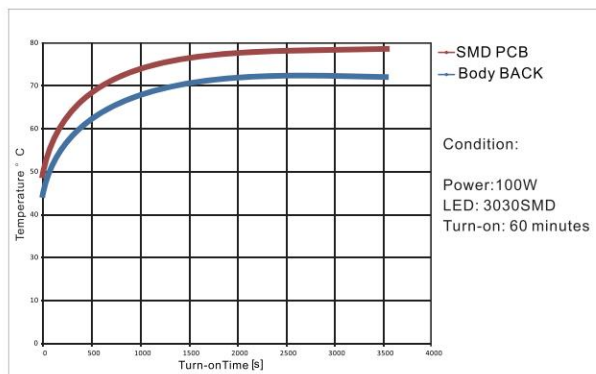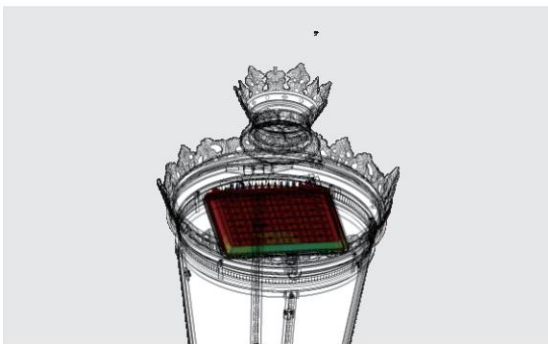

Temperature Rise

°C

Product Overview



Die Cast Aluminum Frames

Driver Fixing Bracket

inventronics Programmable LED driver

Die-casting Frames With Anti-UV And Anti-corrosive Powder Coating

Silicon Gasket

SMD 3030 /5050 LED



Optical Lens

Silicon Gasket

Toughened Glass Diffuser

Front Cover

Silicon Gasket

Toughened Glass Diffuser


PC Diffuser

Support Frame


Artistic Support Arms

Adapter


Light Distributions

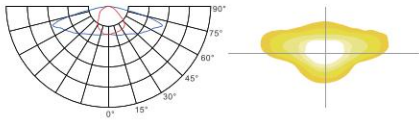


Type I 30x150

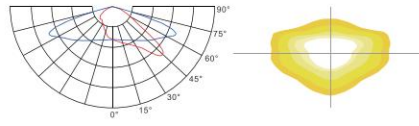


Type II 45x140

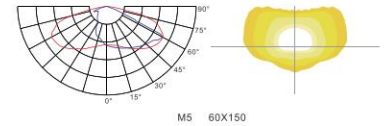


M5 60x150

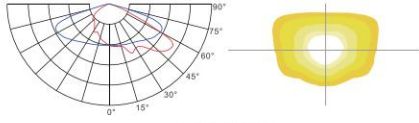


Type III 58x130

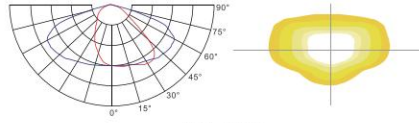


Ver.B 35x140

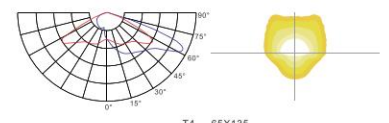


T4 65x135

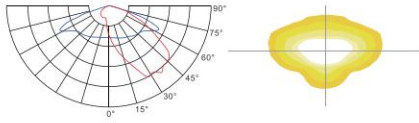


M1 45x130

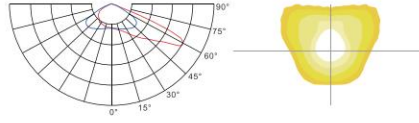


M6 60x135

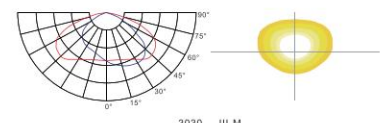


3030 III-M

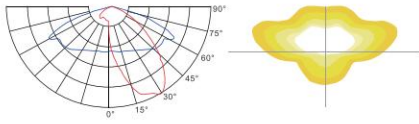


R3 25x140

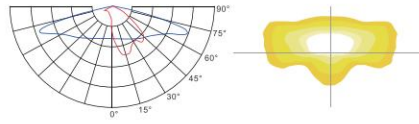


P4 20x145

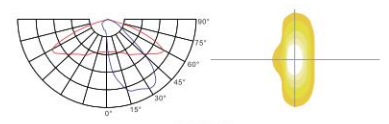



M2 30x130

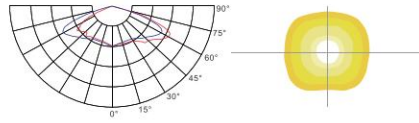


Type V 130x130

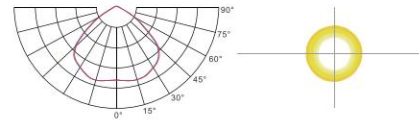


V90 90x90

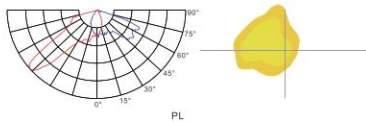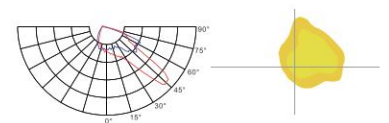


PL

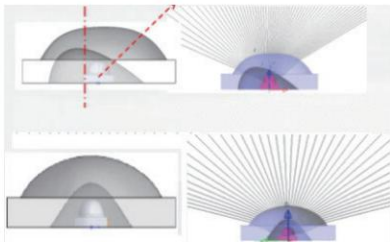

Asymmetric Optics

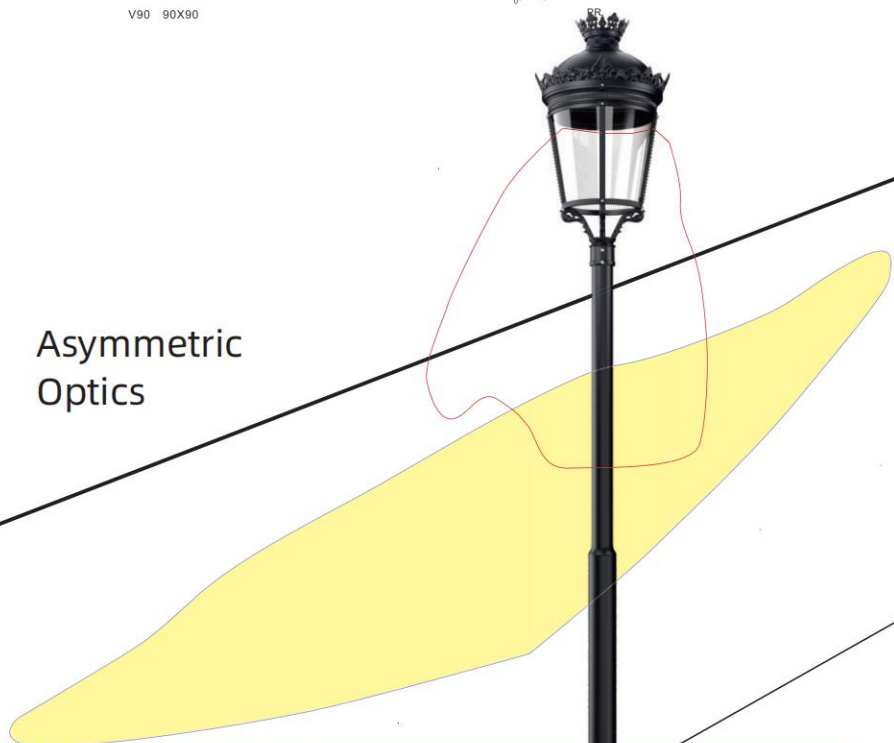

SUGGESTED INSTALLATION HEIGHT

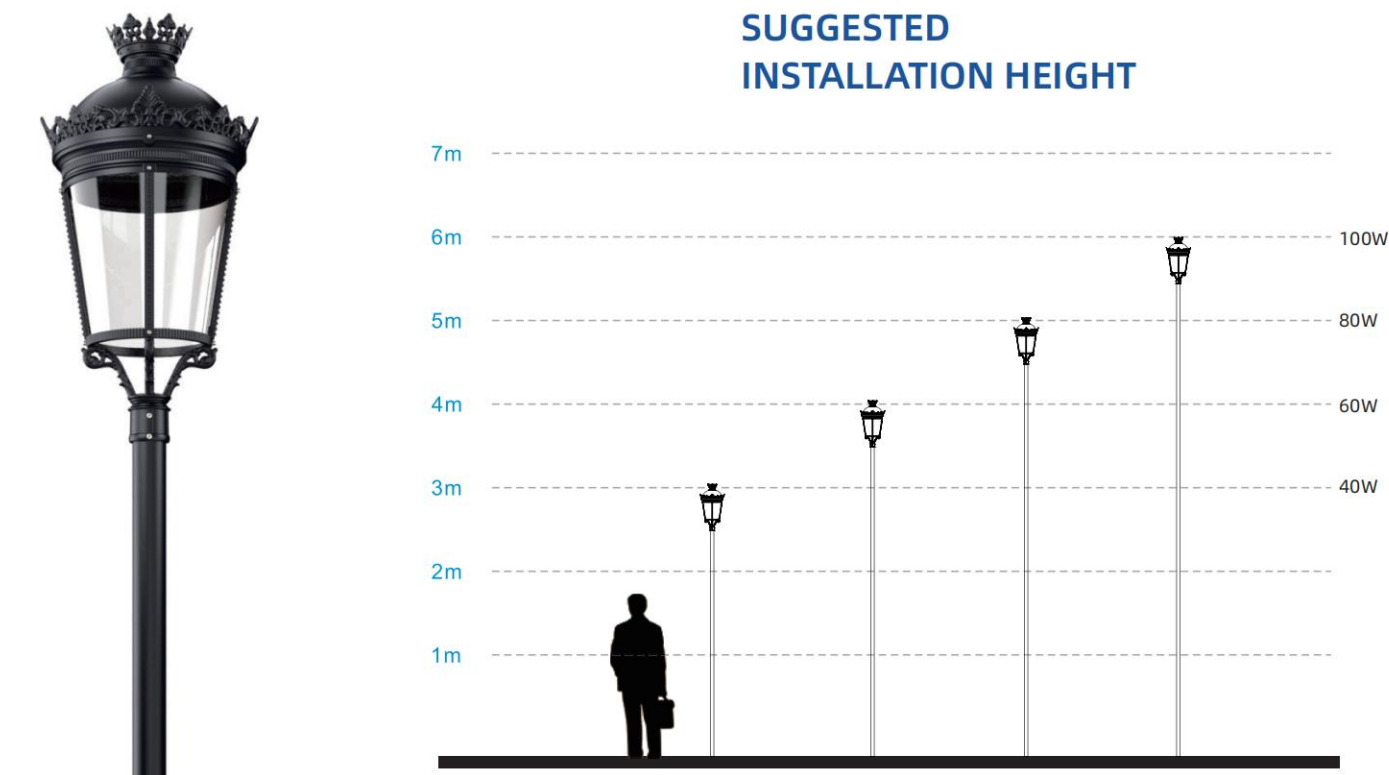

CHARACTERS




Power	40W	60W	80W	100W
Protection Class	CLASS I/II			
IP/IK Rating	IP66, IK08			
Color Temperature	2200K-6500K	2200K-6500K	2200K-6500K	2200K-6500K
Efficiency	135-150 LM/W	135-150 LM/W	135-150 LM/W	135-150 LM/W
CRI	70/80	70/80	70/80	70/80
Input Voltage	AC 90-305V/347V/480V, 50/60Hz			
Driver Suggest	INVENTRONICS EBS, INVENTRONICS EUM			
Dimming	1-10V Dimming (Default) /Timer Dimming			
Surge Recommendation	10KV (Default) / 20KV (available on request)			
LED Type	LUMILEDS SMD LED			
LED Quantities 3030	64	96	144	160
Pcb Input Current (3030)	48V 725mA	96V 560mA	144V 510mA	120V 760mA
LED Quantities 5050	24	24	36	36
Pcb Input Current (5050)	66V 520mA	66V 820mA	88V 820mA	88V 1050mA
Mounting	On pole with 60 mm top diameter, , adaptor 76 mm top diameter can be chosen			
Material	Die casting with standard adc12 type aluminum, tempered glass, stainless 314 clips and screws. Clear polycarbonate with uv-resistant acrylic. Option for screen for asymmetrical light.			
Painting Color Suggest	RAL9005 Jet Black /Other Colors on request			
Available on request	NEMA socket (3/5/7pins), ZHAGA socket, Short cap, Photocell, NTC, OLC, DALI Dimming			
Weight	Net weight: 10.8kgs Gross weight: 12.5kgs			
Packing Size	510x510x980mm			

Easy Maintenance Designs

Driver, SPD and power connector are fixed to a removable, + tool-free tray. Easy to take off.



Unit : mm

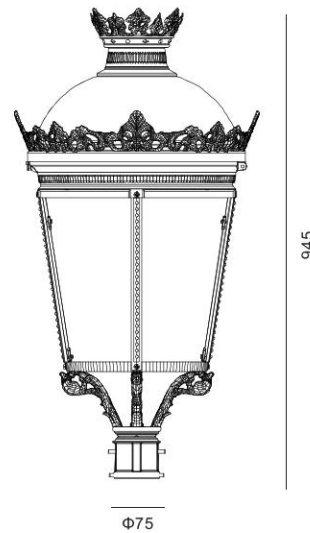

L ↔ N **6KV**


10KV