

The image displays the mounting instructions for the S8 outdoor lamp. On the left, a dark grey box contains the text "Mounting instructions" and the number "900". To the right, a large illustration shows the lamp's ornate design, featuring a crown-like top and a glass-enclosed body. Below the lamp, several icons provide additional information: a small box icon with an arrow pointing out, a manual icon showing a person using tools, a hex key icon labeled "S8", and a series of certification and specification icons at the bottom. These include a height range of 6-8 m, CE marking, IEC EN60598, an outdoor rating with a house icon, voltage (85V-305V) and frequency (50Hz/60Hz) specifications, a ground symbol, a square symbol, IP66 protection rating, IK09 impact resistance, a temperature range from -40°C to +40°C, and a warning against disposal in household waste.

Mounting instructions

900

S8

6-8 m

CE

IEC
EN60598

outdoor



85V-
305V

50Hz
60Hz

IP66

IK09

Max.
40°C
Min.
-40°C

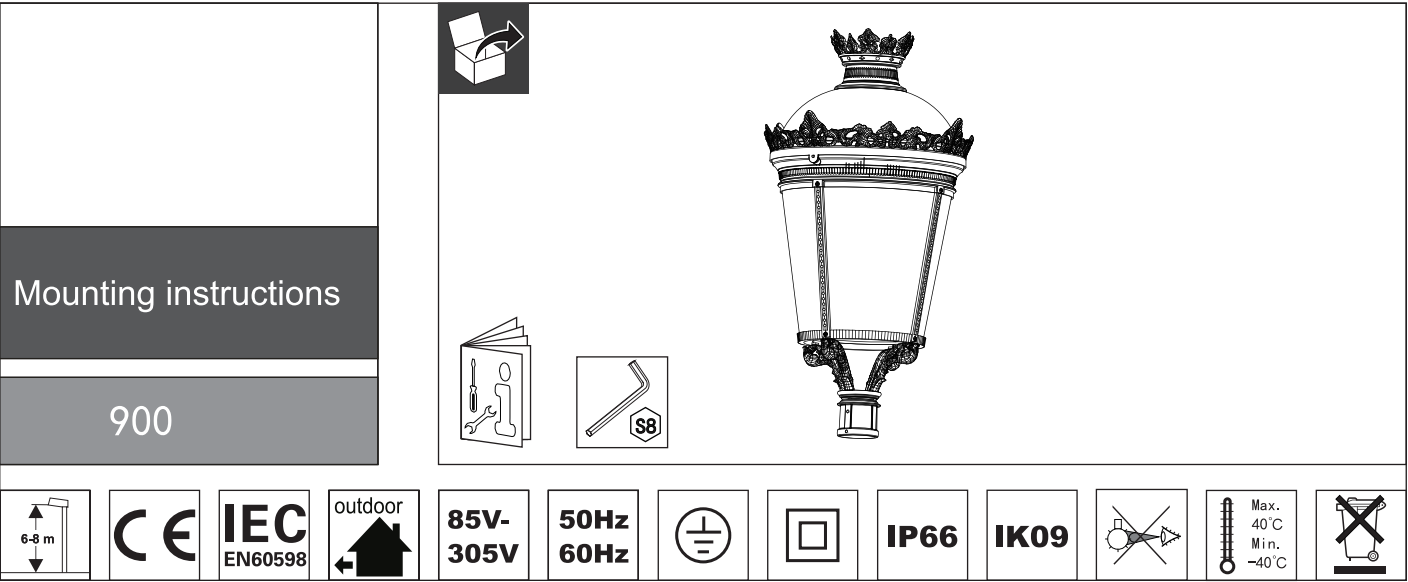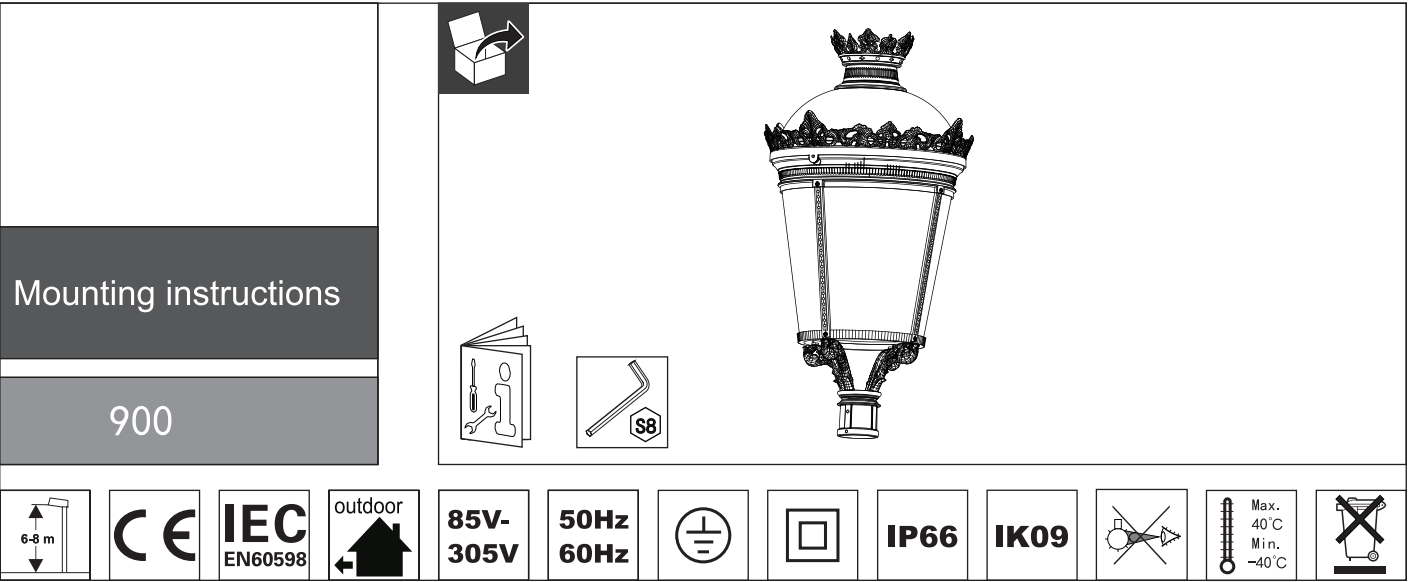[illegible]

Dimensions in mm

Technical drawing of the SCx=0.34 m² luminaire. The drawing includes three views: a top view, a side view, and a detail view of the mounting bracket. The top view shows a circular luminaire with a diameter of 493 mm. The side view shows the luminaire with a height of 945 mm and a mounting bracket with a diameter of 70 mm and a height of 80 mm. The detail view shows the mounting bracket with a diameter of 55-60 mm and a height of 90 mm. The luminaire is labeled SCx=0.34 m².

Dimensions in mm


Technical drawing of the SCx=0.34 m² luminaire. The drawing includes three views: a top view, a side view, and a detail view of the mounting bracket. The top view shows a circular luminaire with a diameter of 493 mm. The side view shows the luminaire with a height of 945 mm and a mounting bracket with a diameter of 70 mm and a height of 80 mm. The detail view shows the mounting bracket with a diameter of 55-60 mm and a height of 90 mm. The luminaire is labeled SCx=0.34 m².

Dimensions in mm


Technical drawing of the SCx=0.34 m² luminaire. The drawing includes three views: a top view, a side view, and a detail view of the mounting bracket. The top view shows a circular luminaire with a diameter of 493 mm. The side view shows the luminaire with a height of 945 mm and a mounting bracket with a diameter of 70 mm and a height of 80 mm. The detail view shows the mounting bracket with a diameter of 55-60 mm and a height of 90 mm. The luminaire is labeled SCx=0.34 m².

Dimensions in mm


Technical drawing of the SCx=0.34 m² luminaire. The drawing includes three views: a top view, a side view, and a detail view of the mounting bracket. The top view shows a circular luminaire with a diameter of 493 mm. The side view shows the luminaire with a height of 945 mm and a mounting bracket with a diameter of 70 mm and a height of 80 mm. The detail view shows the mounting bracket with a diameter of 55-60 mm and a height of 90 mm. The luminaire is labeled SCx=0.34 m².

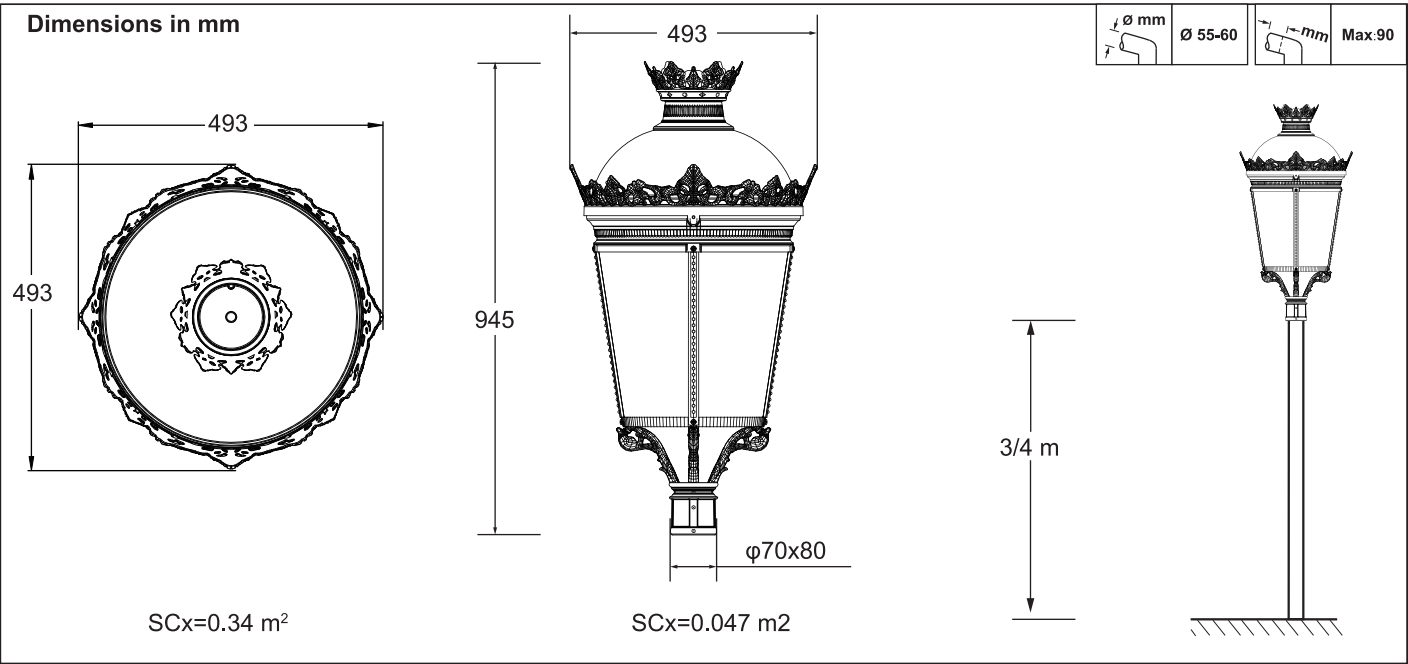

1

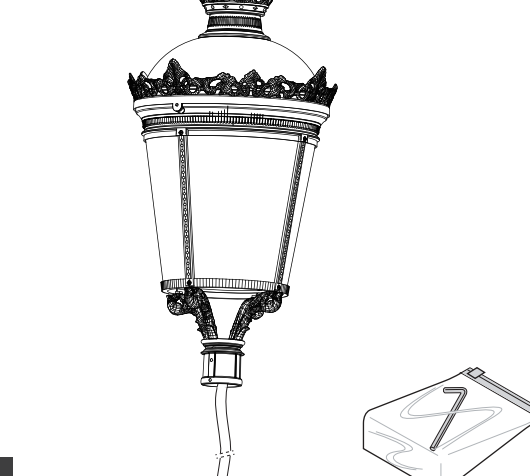


A detailed line drawing of a decorative street lamp. The lamp has a crown-like top, a decorative band with a central ornament, and a large, ornate body. It is mounted on a decorative post. To the right of the lamp is a small, rectangular box with the number 7 on it.

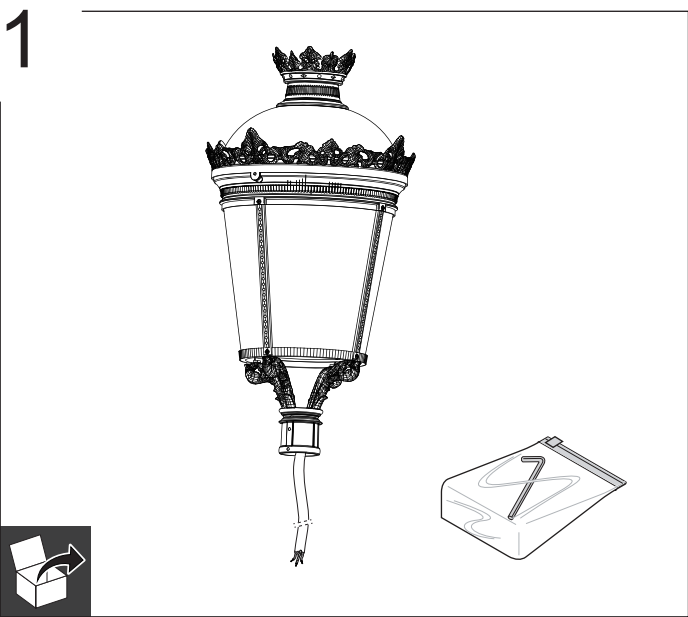


1'

A detailed line drawing of a classic street lamp. The lamp has a decorative, ornate top with a crown-like finial. Below the finial is a coin slot, indicated by a dashed line and a coin being inserted. The lamp body is a large, rounded lantern with a decorative band around the middle. The bottom of the lamp is a small, ornate base. The lamp is mounted on a pole.

A small recycling symbol (a triangle of arrows) and a trash can icon with a recycling symbol on it, located in the bottom right corner of the page.

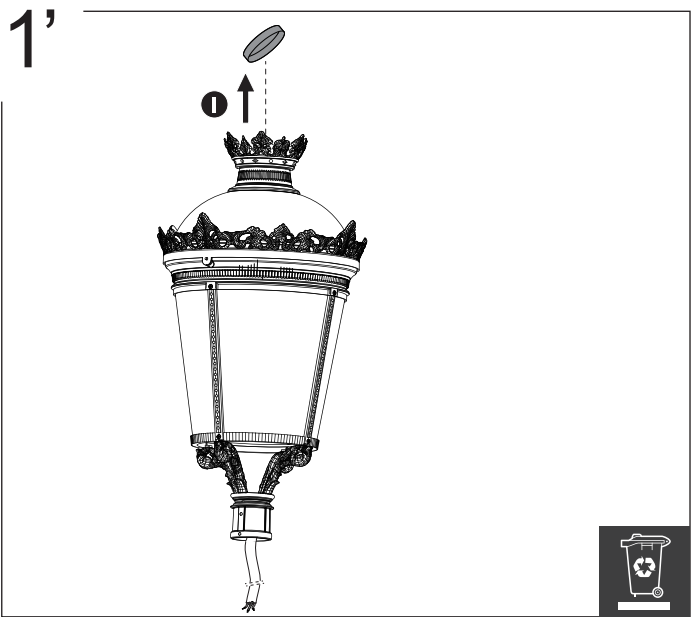

2

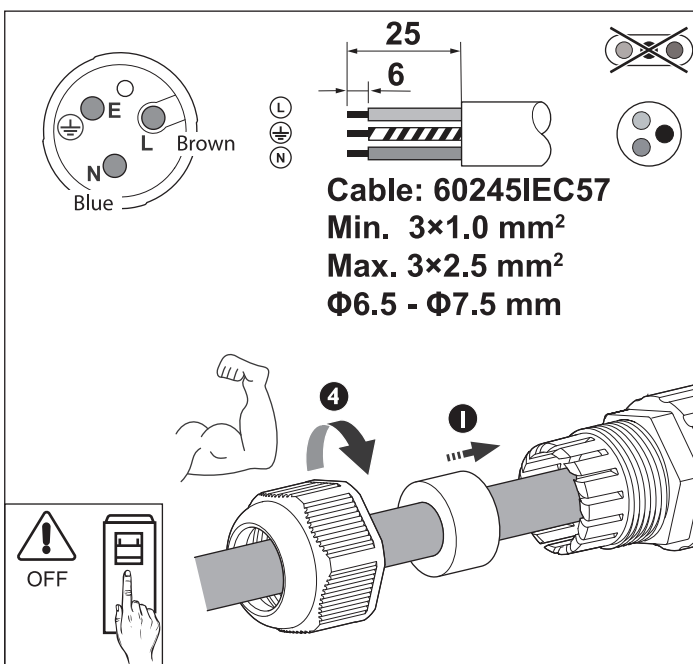


3

IP68 rated connector not included



4

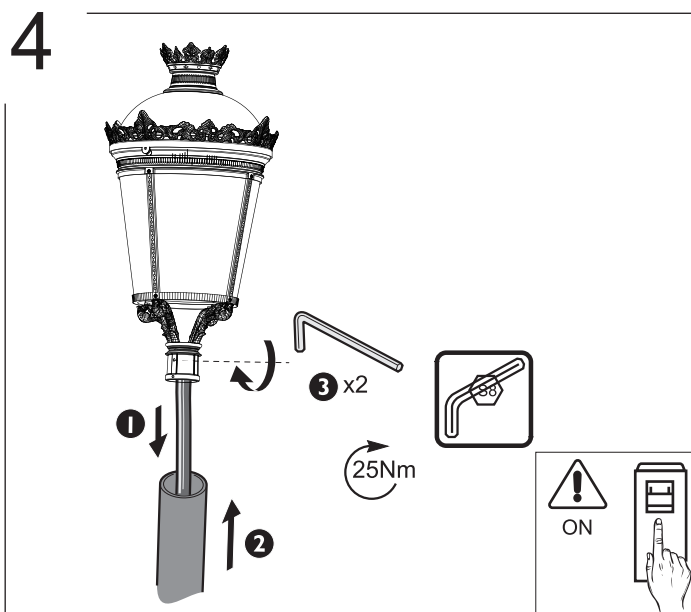

5

