

# ZGSM-ST17-80S

Introducing a New Premium Experience



CE CB RoHS  
LM-79 LM-80 TM-21 ENEC  
5 YEAR WARRANTY

## Specifications

### Electrical Specifications:

|                       |                                   |
|-----------------------|-----------------------------------|
| Model No.             | ZGSM-ST17-80S                     |
| Nominal Wattage       | 80W                               |
| Nominal Voltage       | AC 100-240V / 277V, 50/60Hz       |
| LED                   | Lumileds, Luxeon 3030 2D          |
| Driver                | Inventronics, EBS-080S105BT2      |
| Optional Function     | OLC, NTC, StepDIM, 0(1)-10V, DALI |
| Operating Temperature | -40 °C to +50 °C                  |
| Power Factor (PF)     | > 0.95                            |
| THD                   | < 15                              |
| Protection            | Class I ( Class II optional )     |
| SPD                   | 10KV (20KV optional)              |

### Photometric Specifications:

Lumen Output Regular Version: 11200 lm ( ±5% )

Optic TYPE II, TYPE III


CRI Ra ≥ 70 (80 optional)

CCT




### Mechanical Specifications:


|                      |                                                |
|----------------------|------------------------------------------------|
| Ratings              | IP66, IK10                                     |
| Lifetime             | > 100, 000 hours-L70, @25 °C (77 °F)           |
| Body                 | High pressure die-cast aluminum, self cleaning |
| Pole Fitter Diameter | 48-60mm                                        |
| Lens                 | UV-resistant Polycarbonate                     |
| Fixture Dimension    | 610 x 190 x 143 mm                             |
| Packing Dimension    | 545 x 240 x 175 mm                             |
| Fixture Weight       | 4.7 kg                                         |
| Packing Weight       | 5.2 kg                                         |

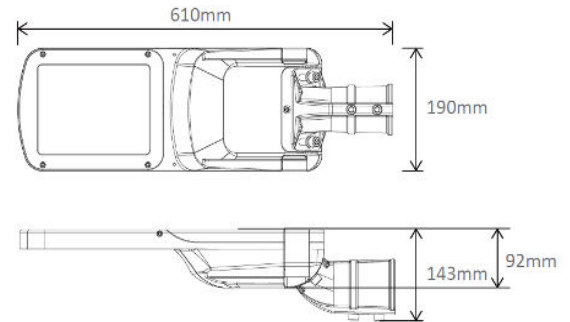

### 3030 Version

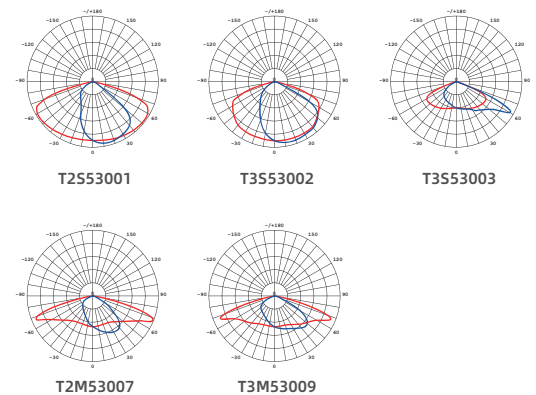

### 5050 Version

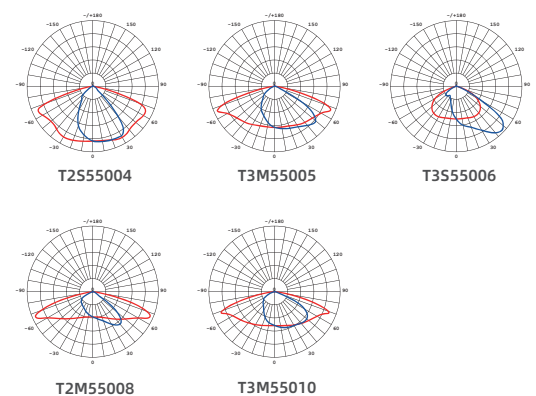

### Optional accessories:

